# 24V AC Boxed Power Supply


#### **Product:**



The power distribution system of metal boxed power supply makes it with multiple outputs, Individual PTC resettable fuses on channel boards can protect the device from over load or short circuit. Output voltage is adjustable to bear voltage drop after longer distance transmission. The device is your first choice of power solution in CCTV System.

### **Features:**

- AC input 110V or 220V, 60Hz or 50Hz.
- 24Vac output.
- Individually PTC fused terminals.
- LED indicator per output.
- Short circuit protection. High voltage protection. Over current protection.

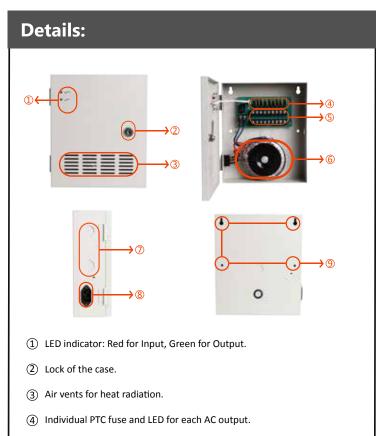

- (5) Low Voltage Outputs. Accessed via terminal blocks.
- 6 Toroidal transformer.
- Cable threading prefabricated conduit holes.
- (8) AC Input: 3 pins IEC socket.
- (9) Wall-mounting holes.

Accessories				
Name	Keys for door lock	Screws and raw plugs for wall-mounting		Small Screws for locking case lid
Picture				N/N
Quantity	2	4	4	2

## **Installation Steps**

- 1. Mount the enclosure in a preselected location that is not in direct sunlight and is protected from moisture.
- 2. Knock out the appropriate prefabricated 22 mm conduit holes for your input & output cables.
- 3. Turn the internal power switch to the "OFF" position.
- Connect all of your camera cables to the individually protected 24Vac outputs, accessed via the terminal blocks.
- 5. Connect AC110 or 220Vac mains voltage to the AC input 3 pins IEC socket.
- 6. Turn the internal power switch to the "ON" position. The green LED located on the front of the unit should now be illuminated.
- 7. Close the cover and secure it with the door lock and provided screws.

## **Caution**:

- Do not disassemble or tamper with the power supply unit.
- High voltage inside.
- Indoor use only.



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority for recycling advice.